

Remote AP (RAP) Supplemental Instructions for model AP-303H or AP-205H

Overview

These are supplemental instructions in addition to the regular setup instructions provided to you with your RAP. This supplemental covers additional types of power sources you may have been provided, and also what to do if you were not provided a desk stand with your RAP.

1. Power

You may have been provided a power source different than the standard Power Injector (pictured right; may be black or white) outlined in your instruction sheet.

See page 2 for additional information about different power sources for your RAP if you were not provided a Power Injector that looks like the image to the right.




2. Desk Stand

You also may or may not have been provided a desk stand for your RAP.

See page 3 for additional information if you were not provided a desk stand.

Without desk stand:

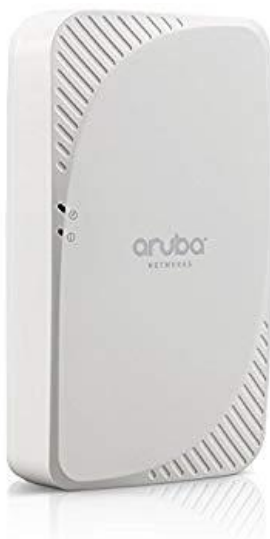

With desk stand:



Power

You may have been provided an AC Power Adapter (pictured right; specific make/model may vary).



You will still use the provided power cable (Item E on your instruction sheet; pictured right) to power the AC Adapter from an electrical outlet.

NOTE...

You will only need to use one network cable (you were provided two). The one network cable used will connect from the E0 port on the RAP to the uplink port at your home that provides the internet connection.



You will then use the small plug to power the RAP by plugging it into the small power port on the side of the RAP (pictured right).



Desk Stand

You may not have been provided a desk stand due to availability. Without a desk stand, the WAN uplink to your RAP is set up slightly different.


In Setup Step 1 of your instruction sheet, rather than plugging the network cable into the E0/PT port on the bottom of the RAP, you will instead plug your network cable into the E0 port on the back of the RAP.

Remember – this only applies if you do not have a desk stand, and you have access to the ports on the back of the RAP.

NOTE – Do not block, cover, or otherwise inhibit air flow to and around the RAP.

DO NOT PLUG YOUR UPLINK CABLE INTO THE BOTTOM OF THE RAP

Figure 3 Bottom

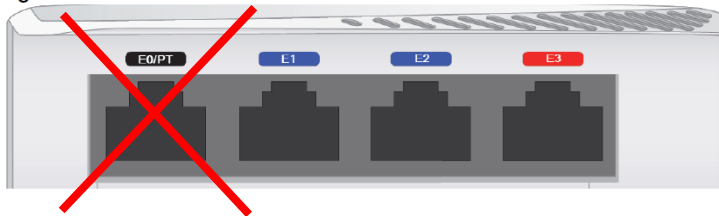

PLUG YOUR UPLINK CABLE INTO THE E0 PORT ON THE BACK OF THE RAP

